


仅供参考




REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

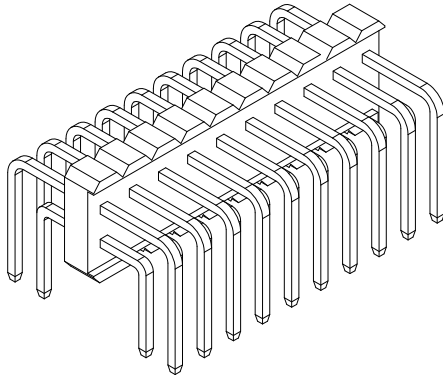


Specification:
Current Rating : 3.0AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard:PBT/PA6T/LCP
Contact: Brass
Plating : Au or Sn Over 50u" Ni

Height

H=1.5mm、3.0mm、3.3mm

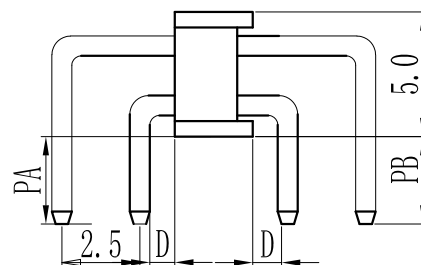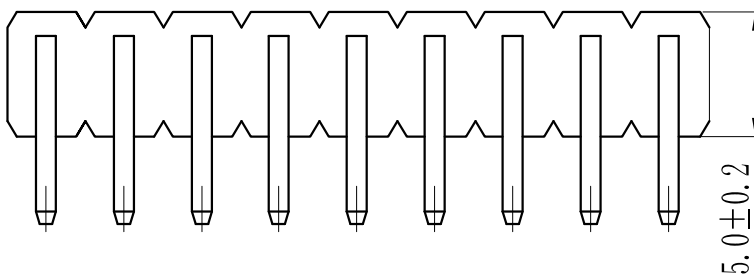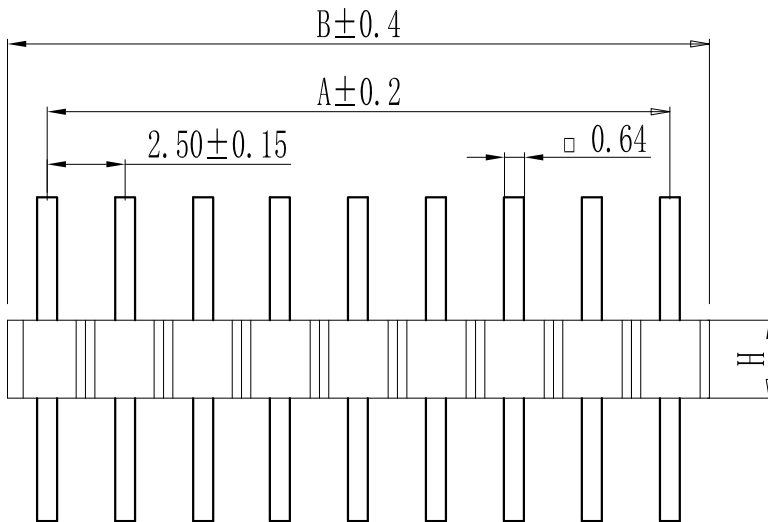

Pin数	尺寸A	尺寸B
2×1	-	2.50
2×2	2.50	5.00
2×3	5.00	7.50
2×4	7.50	10.00
2×5	10.00	12.50
2×6	12.50	15.00
2×7	15.00	17.50
2×8	17.50	20.00
2×9	20.00	22.50
2×10	22.50	25.00
2×11	25.00	27.50
2×12	27.50	30.00
2×13	30.00	32.50
2×14	32.50	35.00
2×15	35.00	37.50
2×16	37.50	40.00
2×17	40.00	42.50
2×18	42.50	45.00
2×19	45.00	47.50
2×20	47.50	50.00
2×21	50.00	52.50
2×22	52.50	55.00
2×23	55.00	57.50
2×24	57.50	60.00
2×25	60.00	62.50
2×26	62.50	65.00
2×27	65.00	67.50
2×28	67.50	70.00
2×29	70.00	72.50
2×30	72.50	75.00
2×31	75.00	77.50
2×32	77.50	80.00
2×33	80.00	82.50
2×34	82.50	85.00
2×35	85.00	87.50
2×36	87.50	90.00
2×37	90.00	92.50
2×38	92.50	95.00
2×39	95.00	97.50
2×40	97.50	100.00

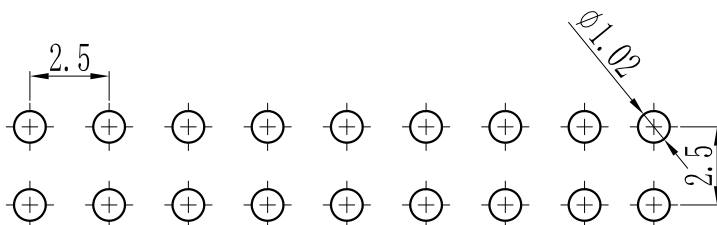

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn 电 邮: 2850175982@qq.com 公司电话: 0755-23765350 公司传真: 0755-23765341	PART. NO: ST-PH-250-0085		
	LINEAR	ANGLES	APPROVED				DWG. NO:		
	0.0±0.30	X° REF±6°	DESIGNER						
UNIT: MM	0.00±0.20	X° ±3°				TITLE: Pitch2.50mm Pin Header,Single Plastic, Dual Row,Right Angle Type	REV:	A0	SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16				