


仅供参考







REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16



Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 7A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+120°C

STP43501W00-2XNP*-B3-**

STP43501W01-2XNP*-B3-**

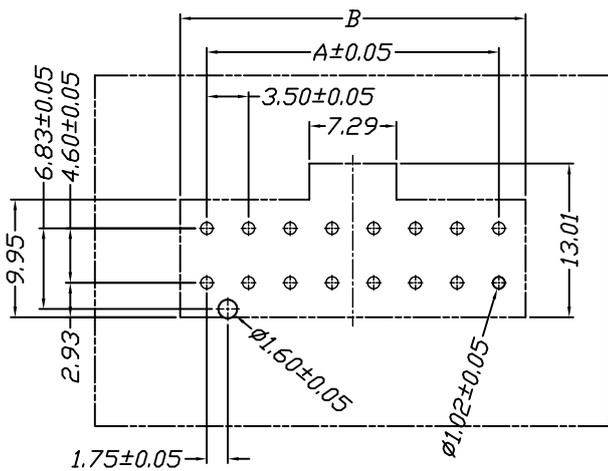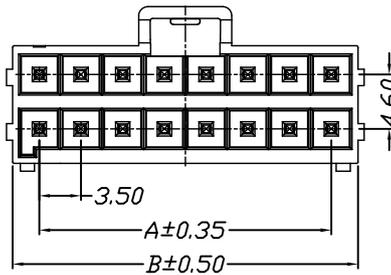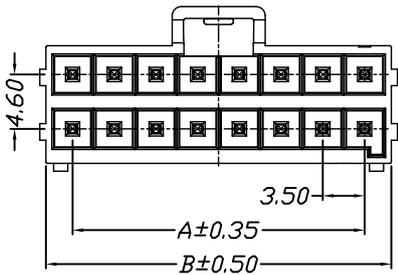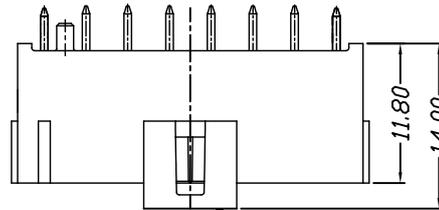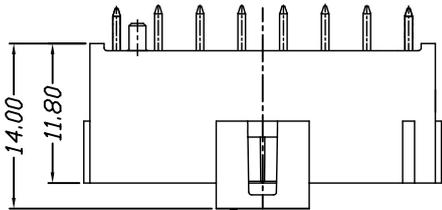

P.C.B. LAYOUT

Poles	Dimensions	
	A	B
2*2P	3.50	8.00
2*3P	7.00	11.50
2*4P	10.50	15.00
2*5P	14.00	18.50
2*6P	17.50	22.00
2*7P	21.00	25.50
2*8P	24.50	29.00

Material	Color	PIN Material
LCP	Black	Brass/Tin-plated

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: WWW.SZSITUAO.CN 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP43501W0X-2XNPX-B3-XX
	LINEAR	ANGLES					
UNIT: MM	0.00±0.25	X° REF±6°	DESIGNER			TITLE:	DWG. NO:
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16	3.50mm Pitch 180° Dual Wafer DIP Type	REV: A0
A	B	C	D	E	F	G	SHEET: 1/1