



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16





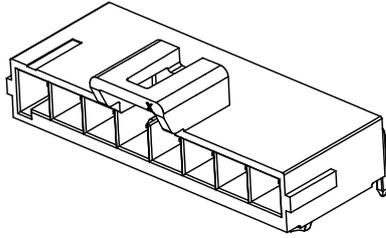


Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 7A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+120°C

STP43501W90-NP*-B3-**

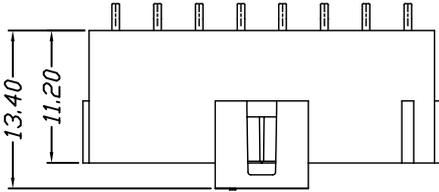

STP43501W91-NP*-B3-**

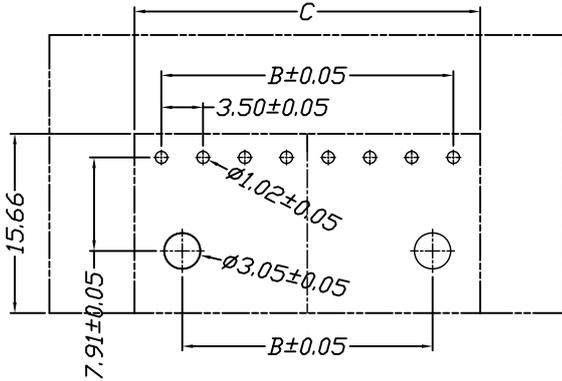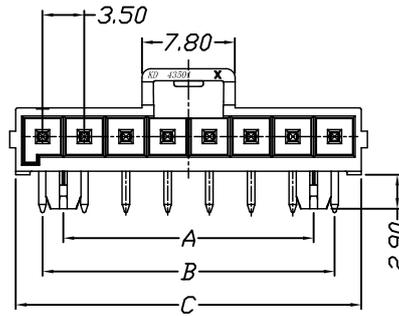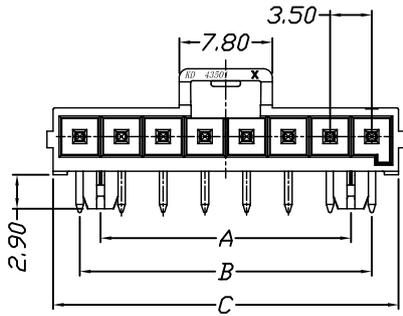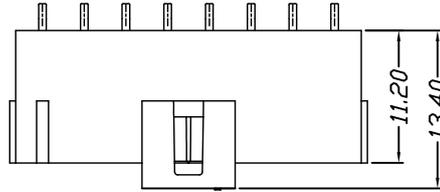

P.C.B. LAYOUT

Poles	Dimensions		
	A	B	C
2P	—	3.50	8.00
3P	—	7.00	11.50
4P	7.00	10.50	15.00
5P	10.50	14.00	18.50
6P	14.00	17.50	22.00
7P	17.50	21.00	25.50
8P	21.00	24.50	29.00

Material	Color	PIN Material
LCP	Black	Brass/Tin-plated

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
	LINEAR	ANGLES			
0.0±0.35	X° REF±6°		APPROVED		
UNIT: MM	0.00±0.25	X° ±3°	DESIGNER		
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16

深圳市思拓展电子有限公司
 SHENZHEN SINOTOP ELECTRONICS CO., LTD
 公司网址: www.szsituo.cn 公司电话: 0755-23765350
 电子邮箱: 2850175982@qq.com 公司传真: 0755-23765341

TITLE:
3.50mm Pitch 90° Single Wafer DIP Type

PART NO:	STP43501W9X-NPX-B3-XX	
DWG NO:		
REV:	A0	SHEET: 1/1

A B C D E F G H