
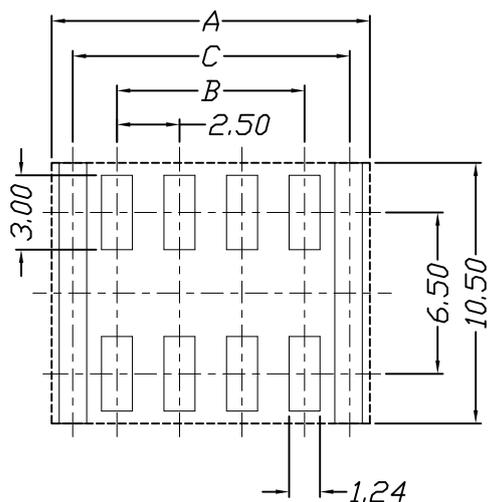
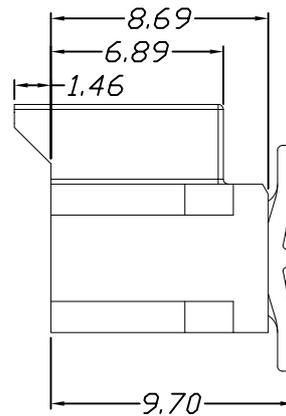
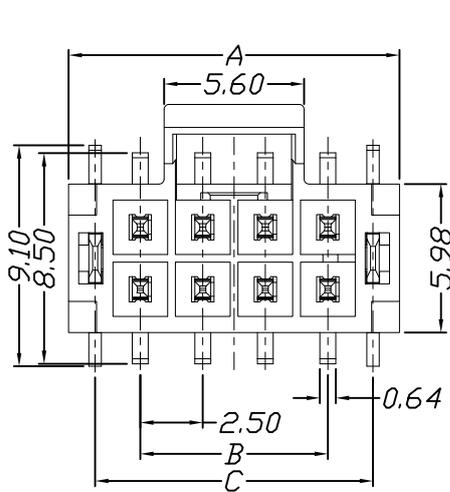


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C

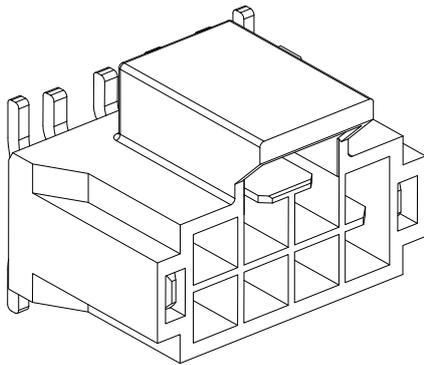

P.C.B. LAYOUT

Poles	Dimensions		
	A	B	C
2*2P	8.23	2.50	6.11
2*3P	10.73	5.00	8.61
2*4P	13.23	7.50	11.11
2*5P	15.73	10.00	13.61
2*6P	18.23	12.50	16.11
2*7P	20.73	15.00	18.61
2*8P	23.23	17.50	21.11

Material	Color	PIN Material
LCP	Black	Brass

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: WWW.SZSITUA.COM 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP42508W00-2XNPX-B3-XX	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.35	X° REF±6°	DESIGNER					
	UNIT: MM	0.00±0.25	X° ±3°	DRAWN	肖坤权		2017.06.16	REV: A0
SIZE: A4	0.000±0.15	X° X'±2°				TITLE: 2.50mm Pitch 180° Wafer SMT Type		