
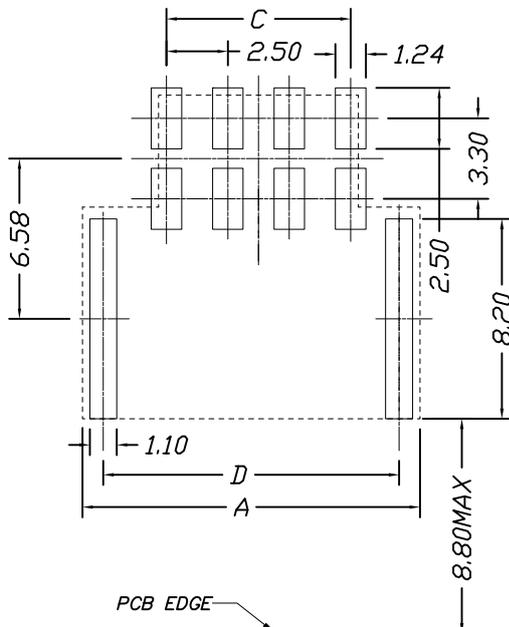
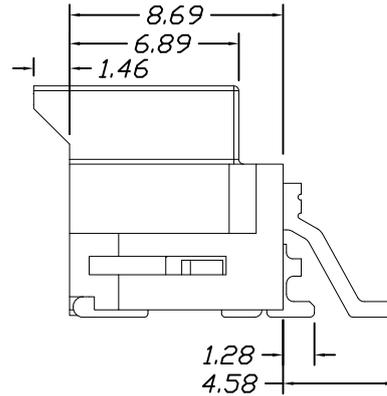
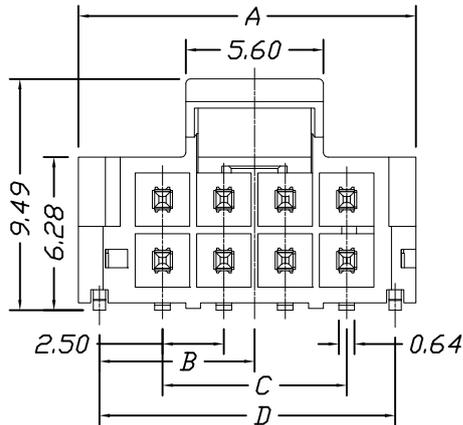


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 1500V AC/minute
 Contact Resistance : 40mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -40°C~+105°C

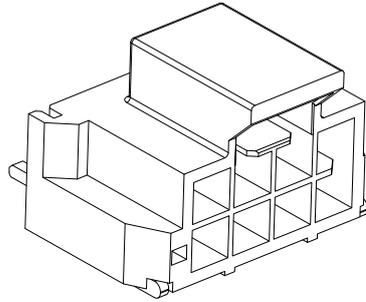

RECOMMENDED PCB LAYOUT (CONNECTOR SIDE VIEW)
 THICKNESS=1.6mm MIN. TOLERANCE: 0.05
 RECOMMENDED STENCIL THICKNESS=0.2MM.

Poles	Dimensions			
	A	B	C	D
4P	8.74	3.82	2.50	7.04
6P	11.24	5.07	5.00	9.54
8P	13.74	6.32	7.50	12.04
10P	16.24	7.57	10.00	14.54
12P	18.74	8.82	12.50	17.04
14P	21.24	10.07	15.00	19.54
16P	23.74	11.32	17.50	22.04

Material	Color	PIN Material
LCP	Black	Brass

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: WWW.SZSITUAO.CN 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART NO: STP42508W90-2XNPX-A2-XX	
	LINEAR	ANGLES	APPROVED				DWG. NO:	
	0.0±0.35	X° REF±6°	DESIGNER					
	UNIT: MM	0.00±0.25	X° ±3°	TITLE:				REV: A0 SHEET: 1/1
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16	2.50mm Pitch 90° Wafer SMT Type		