


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

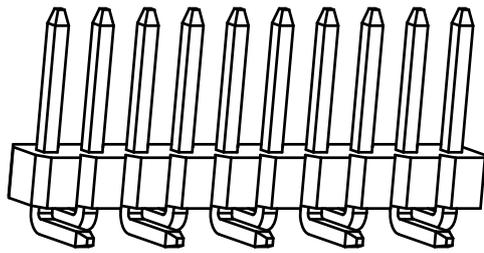

Specification:
 Current Rating : 3.0AMP
 Temperature Range : -40°Cto+105°C
 Contact Resistance : 20mΩ Max
 Insulation Resistance : 1000MΩ Min
 Withstanding Voltage : AC 500V
 Material:


Insulator : Polyester (UL94V-0)
 Standard:PBT/PA6T/LCP

Contact: Brass
 Plating : Au or Sn Over 50u" Ni

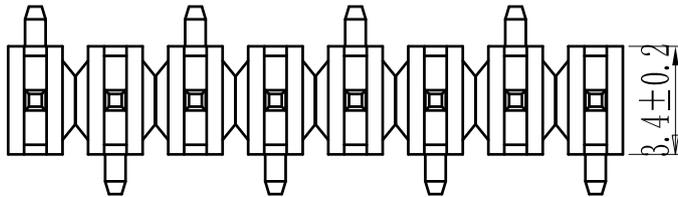




TYPE 1

Height
H=1.5mm、3.0mm、3.3mm

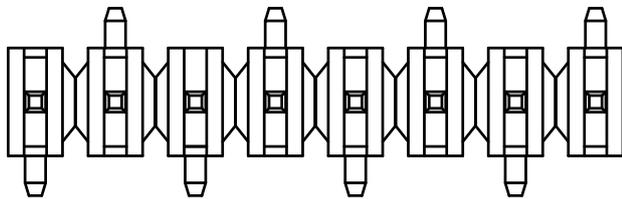

TYPE 2

Pin数	尺寸A	尺寸B
1x1	-	2.50
1x2	2.50	5.00
1x3	5.00	7.50
1x4	7.50	10.00
1x5	10.00	12.50
1x6	12.50	15.00
1x7	15.00	17.50
1x8	17.50	20.00
1x9	20.00	22.50
1x10	22.50	25.00
1x11	25.00	27.50
1x12	27.50	30.00
1x13	30.00	32.50
1x14	32.50	35.00
1x15	35.00	37.50
1x16	37.50	40.00
1x17	40.00	42.50
1x18	42.50	45.00
1x19	45.00	47.50
1x20	47.50	50.00
1x21	50.00	52.50
1x22	52.50	55.00
1x23	55.00	57.50
1x24	57.50	60.00
1x25	60.00	62.50
1x26	62.50	65.00
1x27	65.00	67.50
1x28	67.50	70.00
1x29	70.00	72.50
1x30	72.50	75.00
1x31	75.00	77.50
1x32	77.50	80.00
1x33	80.00	82.50
1x34	82.50	85.00
1x35	85.00	87.50
1x36	87.50	90.00
1x37	90.00	92.50
1x38	92.50	95.00
1x39	95.00	97.50
1x40	97.50	100.00

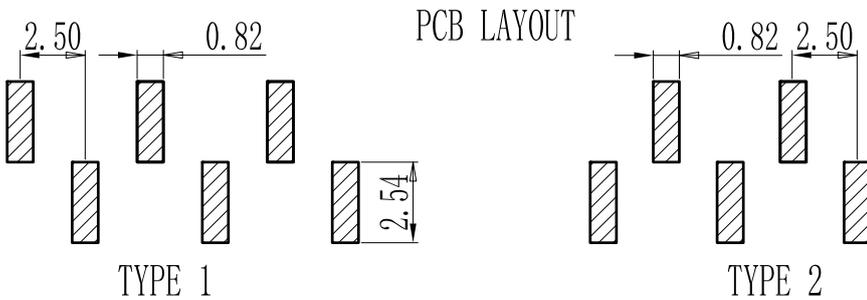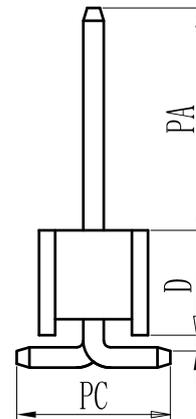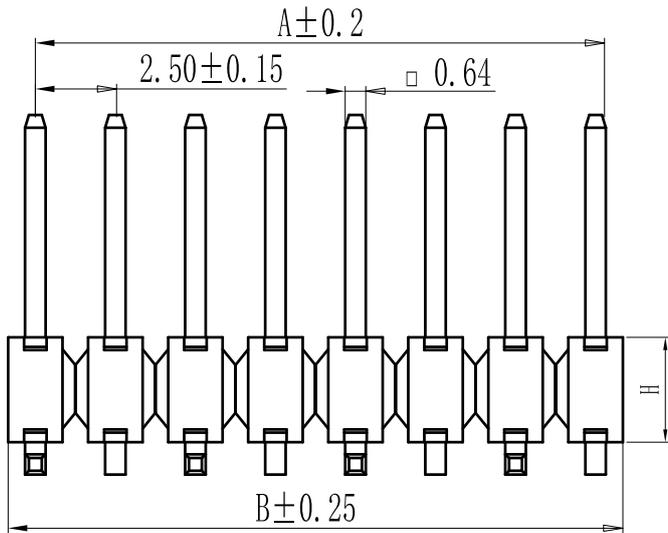

TYPE 1

TYPE 2

8	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司地址: WWW.SZSITUAO.COM 2850175982@qq.com 公司电话: 0755-23765350 公司传真: 0755-23765341	PART. NO: ST-PH-250-0071
	LINEAR	ANGLES	APPROVED				DWG. NO:
	0.0±0.30	X° REF±6°	DESIGNER				REV: A0
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权		2017.06.16
SIZE: A4	0.000±0.10	X° X'±2°	TITLE: Pitch2.50mm Pin Header, Single Plastic, Single Row, SMT Type				