
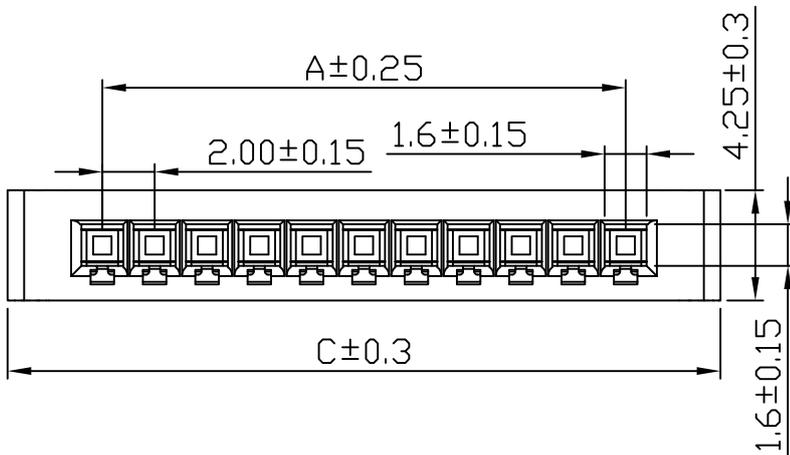
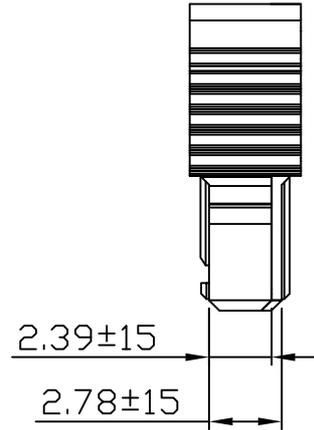


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:
 Voltage Rating : 250V AC/DC
 Current Rating : 3A AC,DC
 Withstand Voltage : 500V AC/minute
 Contact Resistance : 25mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -55°C~+150°C

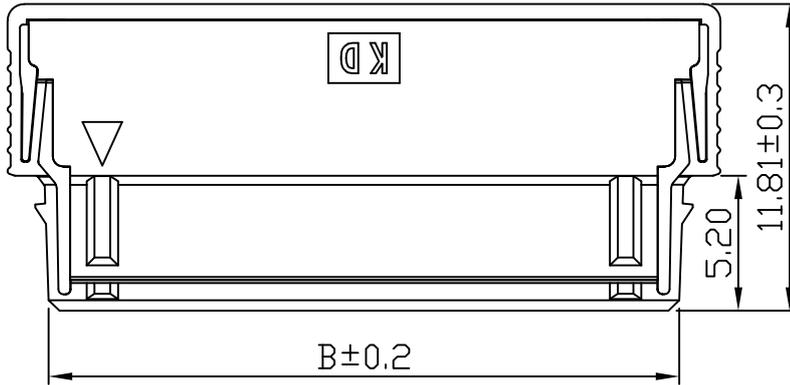

Unit: mm

Part No.	Dimensions		
	A	B	C
1*2P	2.0	6.11	9.24
1*3P	4.0	8.11	11.24
1*4P	6.0	10.11	13.24
1*5P	8.0	12.11	15.24
1*6P	10.0	14.11	17.24
1*7P	12.0	16.11	19.24
1*8P	14.0	18.11	21.24
1*9P	16.0	20.11	23.24
1*10P	18.0	22.11	25.24
1*11P	20.0	24.11	27.24
1*12P	22.0	26.11	29.24
1*13P	24.0	28.11	31.24
1*14P	28.0	30.11	33.24
1*15P	30.0	32.11	35.24
1*16P	32.0	34.11	37.24
1*17P	34.0	36.11	39.24
1*18P	36.0	38.11	41.24
1*19P	38.0	40.11	43.24
1*20P	40.0	42.11	45.24
Material		Color	
PA46,UL94V-0		Black	

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: STP42016H00-1XNPA-JK-RS
	LINEAR	ANGLES					
	0.0±0.35	X° REF±6°	DESIGNER			TITLE:	DWG. NO:
UNIT: MM	0.00±0.25	X° ±3°	DRAWN	肖坤权	2017.06.16	2.00mm pitch Dual Housing	REV: A0
SIZE: A4	0.000±0.15	X° X'±2°					SHEET: 1/1