

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:

Voltage Rating : 250V AC/DC




Current Rating : 3A AC,DC

Withstand Voltage : 500V AC/minute


Contact Resistance : 20mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -55°C~+150°C

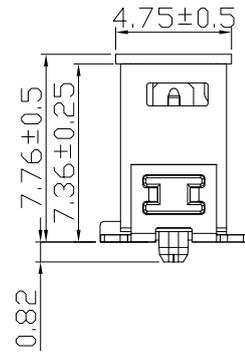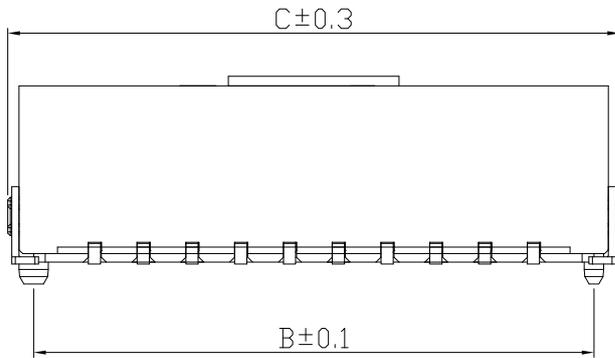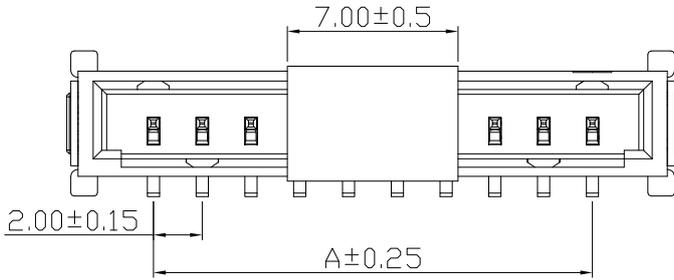

Unit: mm

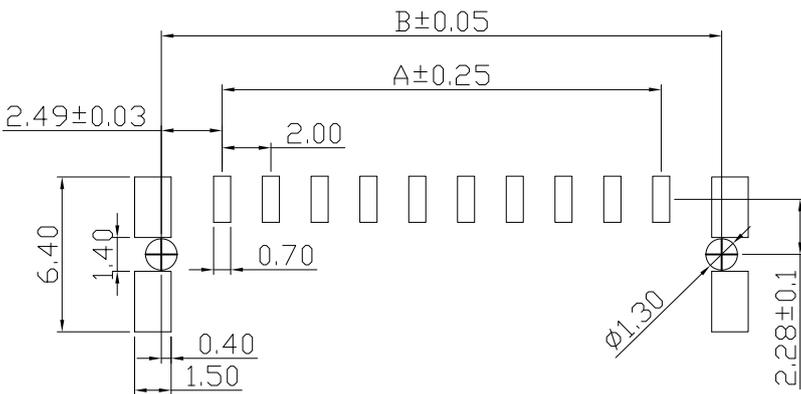

Part No.	Dimensions		
	A	B	C
1*2P	2.0	6.97	9.08
1*3P	4.0	8.97	11.08
1*4P	6.0	10.97	13.08
1*5P	8.0	12.97	15.08
1*6P	10.0	14.97	17.08
1*7P	12.0	16.97	19.08
1*8P	14.0	18.97	21.08
1*9P	16.0	20.97	23.08
1*10P	18.0	22.97	25.08
1*11P	20.0	24.97	27.08
1*12P	22.0	26.97	29.08
1*13P	24.0	28.97	31.08
1*14P	28.0	30.97	33.08
1*15P	30.0	32.97	35.08
1*16P	32.0	34.97	37.08
1*17P	34.0	36.97	39.08
1*18P	36.0	38.97	41.08
1*19P	38.0	40.97	43.08
1*20P	40.0	42.97	45.08

Material	Color	PIN Material
LCP,UL94V-0	Black	Brass

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES					APPROVED	STP42016W00-1xNPA-A1-RS
UNIT: MM	0.0±0.35	X° REF±6°	DESIGNER	TITLE:		DWG. NO:		REV: A0 SHEET: 1/1
SIZE: A4	0.000±0.15	X° X'±2°	DRAWN	肖坤权	2017.06.16	2.00mm pitch Single Wafer		