

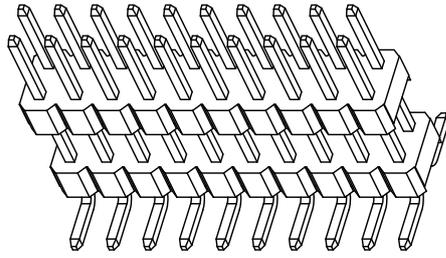


仅供参考




REV.	REVISION RECORD	DATE
A0	新图面发行	2017. 06. 16

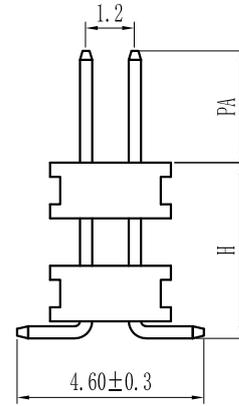

Specification:  
 Current Rating : 0.75AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 30mΩ Max  
 Insulation Resistance : 500MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard: PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

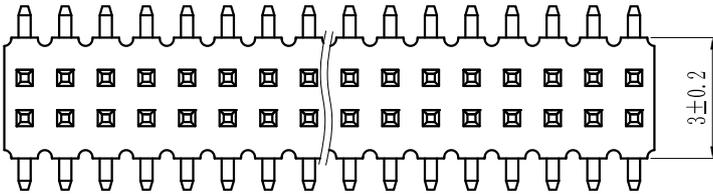

Pin数	尺寸A	尺寸B
2x2	0.8	1.6
2x3	1.6	2.4
2x4	2.4	3.2
2x5	3.2	4.0
2x6	4.0	4.8
2x7	4.8	5.6
2x8	5.6	6.4
2x9	6.4	7.2
2x10	7.2	8.0
2x11	8.0	8.8
2x12	8.8	9.6
2x13	9.6	10.4
2x14	10.4	11.2
2x15	11.2	12.0
2x16	12.0	12.8
2x17	12.8	13.6
2x18	13.6	14.4
2x19	14.4	15.2
2x20	15.2	16.0
2x21	16.0	16.8
2x22	16.8	17.6
2x23	17.6	18.4
2x24	18.4	19.2
2x25	19.2	20.0
2x26	20.0	20.8
2x27	20.8	21.6
2x28	21.6	22.4
2x29	22.4	23.2
2x30	23.2	24.0
2x31	24.0	24.8
2x32	24.8	25.6
2x33	25.6	26.4
2x34	26.4	27.2
2x35	27.2	28.0
2x36	28.0	28.8
2x37	28.8	29.6
2x38	29.6	30.4
2x39	30.4	31.2
2x40	31.2	32.0
2x41	32.0	32.8
2x42	32.8	33.6
2x43	33.6	34.4
2x44	34.4	35.2
2x45	35.2	36.0
2x46	36.0	36.8
2x47	36.8	37.6
2x48	37.6	38.4
2x49	38.4	39.2
2x50	39.2	40.0

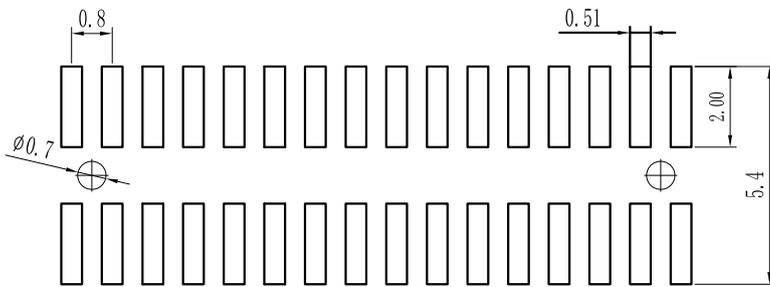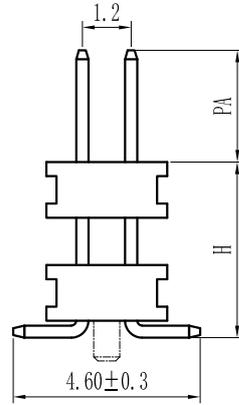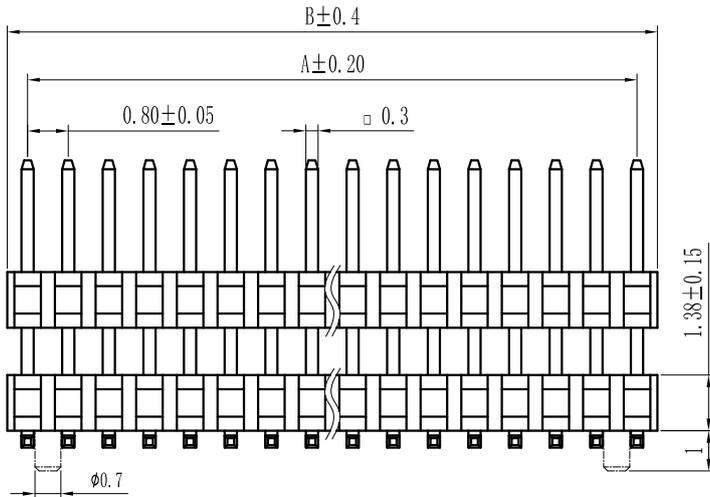

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn      公司电话: 0755-23765350 邮 箱: 2850175982@qq.com      公司传真: 0755-23765341	PART. NO: ST-PH-080-0002	
	LINEAR	ANGLES					APPROVED	DWG. NO:
UNIT: MM	0.0±0.30	X° REF±6°	DESIGNER	TITLE: 0.8*1.2 Pin Header, Dual Plastic, Dual Row, SMT Type			REV: A0	SHEET: 1/1
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017. 06. 16			

A B C D E F G H