
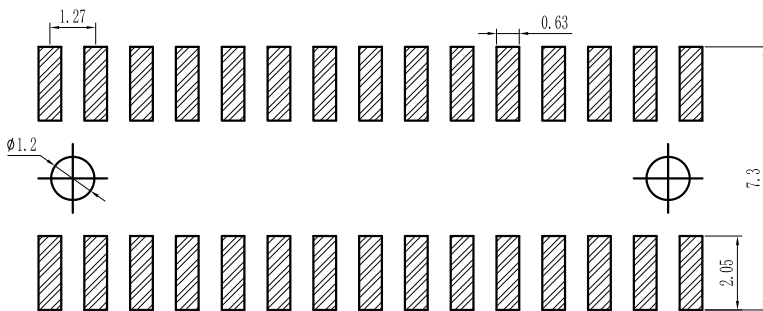

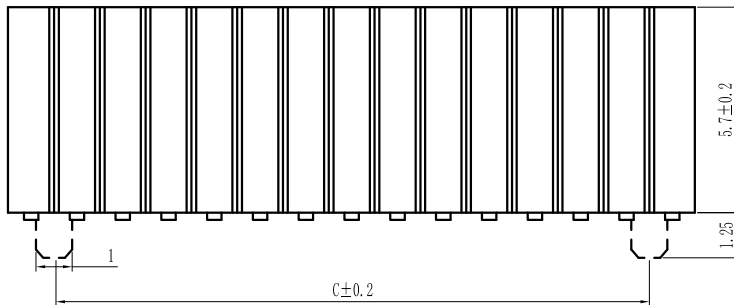
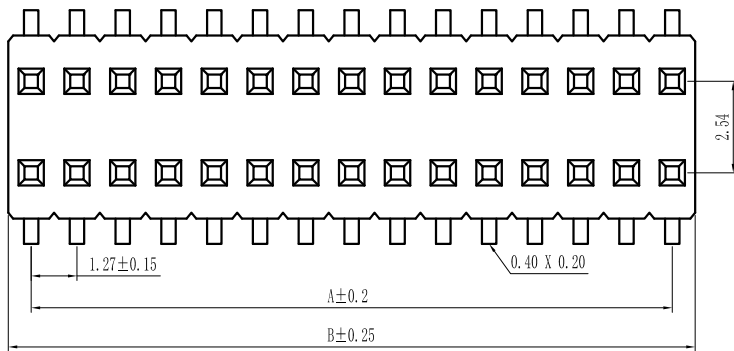


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specification:  
 Current Rating : 1AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard: PBT/PA6T/LCP  
 Contact: Bronze  
 Plating : Au or Sn Over 50u" Ni

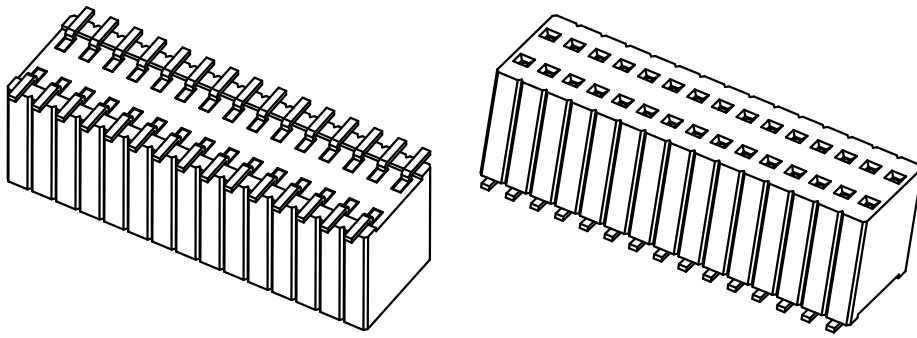

PCB LAYOUT

Pin数	尺寸A	尺寸B	尺寸C
2×2	1.27	2.94	0.00
2×3	2.54	4.21	1.27
2×4	3.81	5.48	2.54
2×5	5.08	6.75	3.81
2×6	6.35	8.02	5.08
2×7	7.62	9.29	6.35
2×8	8.89	10.56	7.62
2×9	10.16	11.83	8.89
2×10	11.43	13.10	10.16
2×11	12.70	14.37	11.43
2×12	13.97	15.64	12.70
2×13	15.24	16.91	13.97
2×14	16.51	18.18	15.24
2×15	17.78	19.45	16.51
2×16	19.05	20.72	17.78
2×17	20.32	21.99	19.05
2×18	21.59	23.26	20.32
2×19	22.86	24.53	21.59
2×20	24.13	25.80	22.86
2×21	25.40	27.07	24.13
2×22	26.67	28.34	25.40
2×23	27.94	29.61	26.67
2×24	29.21	30.88	27.94
2×25	30.48	32.15	29.21
2×26	31.75	33.42	30.48
2×27	33.02	34.69	31.75
2×28	34.29	35.96	33.02
2×29	35.56	37.23	34.29
2×30	36.83	38.50	35.56
2×31	38.10	39.77	36.83
2×32	39.37	41.04	38.10
2×33	40.64	42.31	39.37
2×34	41.91	43.58	40.64
2×35	43.18	44.85	41.91
2×36	44.45	46.12	43.18
2×37	45.72	47.39	44.45
2×38	46.99	48.66	45.72
2×39	48.26	49.93	46.99
2×40	49.53	51.20	48.26
2×41	50.80	52.47	49.53
2×42	52.07	53.74	50.80
2×43	53.34	55.01	52.07
2×44	54.61	56.28	53.34
2×45	55.88	57.55	54.61
2×46	57.15	58.82	55.88
2×47	58.42	60.09	57.15
2×48	59.69	61.36	58.42
2×49	60.96	62.63	59.69
2×50	62.23	63.90	60.96

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szsituo.cn      公司电话: 0755-23765350 邮 箱: 2850175982@qq.com      公司传真: 0755-23765341	PART. NO: ST-FH-127-0061
	LINEAR	ANGLES					APPROVED
UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER	TITLE:	1.27*2.54mm Female Header, Dual Row, Plastic Height 5.7mm, SMT Type		REV: A0
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16		SHEET: 1/1