

孔距 Pitch	A	B	C
4	3.0	5.1	12.0
5	4.0	6.1	13.0
6	5.0	7.1	14.0
7	6.0	8.1	15.0
8	7.0	9.1	16.0
9	8.0	10.1	17.0
10	9.0	11.1	18.0
11	10.0	12.1	19.0
12	11.0	13.1	20.0
13	12.0	14.1	21.0
14	13.0	15.1	22.0
15	14.0	16.1	23.0
16	15.0	17.1	24.0
17	16.0	18.1	25.0
18	17.0	19.1	26.0
19	18.0	20.1	27.0
20	19.0	21.1	28.0
21	20.0	22.1	29.0
22	21.0	23.1	30.0
23	22.0	24.1	31.0
24	23.0	25.1	32.0
25	24.0	26.1	33.0
26	25.0	27.1	34.0
27	26.0	28.1	35.0
28	27.0	29.1	36.0
29	28.0	30.1	37.0
30	29.0	31.1	38.0
31	30.0	32.1	39.0
32	31.0	33.1	40.0
33	32.0	34.1	41.0
34	33.0	35.1	42.0
35	34.0	36.1	43.0
36	35.0	37.1	44.0
37	36.0	38.1	45.0
38	37.0	39.1	46.0
39	38.0	40.1	47.0
40	39.0	41.1	48.0
41	40.0	42.1	49.0
42	41.0	43.1	50.0
43	42.0	44.1	51.0
44	43.0	45.1	52.0
45	44.0	46.1	53.0
46	45.0	47.1	54.0
47	46.0	48.1	55.0
48	47.0	49.1	56.0
49	48.0	50.1	57.0
50	49.0	51.1	58.0
51	50.0	52.1	59.0
52	51.0	53.1	60.0
53	52.0	54.1	61.0
54	53.0	55.1	62.0
55	54.0	56.1	63.0
56	55.0	57.1	64.0
57	56.0	58.1	65.0
58	57.0	59.1	66.0
59	58.0	60.1	67.0
60	59.0	61.1	68.0




技术参数SPECIFICATIONS

极数: 4~60  
 Poles: 4~60  
 额定电压: AC, DC, 50V (50HZ有效值)  
 Voltage rating: AC, DC, 50V (500HZ有效值)  
 额定电流: 0.4A, AC, DC  
 Current rating: 0.4A, AC, DC  
 耐压值: 200V AC/minute  
 Withstang voltage: 200V AC/minute  
 工作温度: -25°C~+85°C  
 Working Temperature: -25°C~+85°C  
 绝缘电阻: ≥500MΩ  
 Insulation resistance: ≥500MΩ  
 接触电阻: ≤0.02Ω  
 Contact resistance: ≤0.02Ω  
 单面接触  
 Single Contact


接触件TERMINAL

材质: 磷青铜  
 Material: Phosphor Bronze  
 塑胶主体HOUSING  
 材质: 热塑性塑料, UL 94V-0  
 Material: Thermoplastic, UL 94V-0  
 包装方式PACKAGE  
 管装 Pipe Package

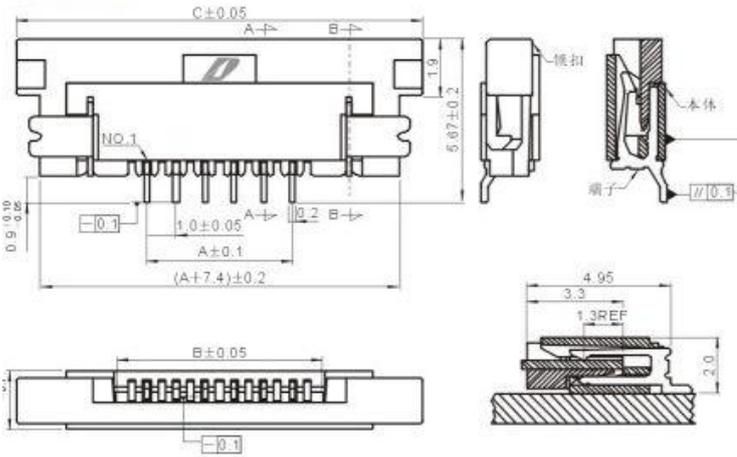

1.0H-W T S-nP

间距:(Pitch) \_\_\_\_\_  
 型号:(Model) \_\_\_\_\_  
 卧式: W \_\_\_\_\_  
 Horizontal type: W \_\_\_\_\_  
 贴式: T \_\_\_\_\_  
 SMT: T \_\_\_\_\_  
 上接点:S(下接点:X) \_\_\_\_\_  
 Top of contact:S(Bottom of contact:X) \_\_\_\_\_  
 线数 (Hole location) \_\_\_\_\_

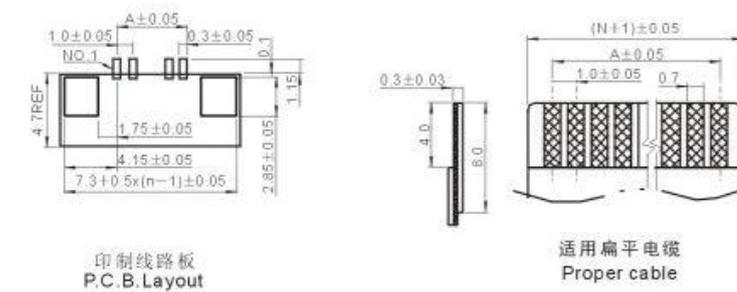

印制线路板 P.C.B. Layout

适用扁平电缆 Proper cable

思拓电子有限公司 SINOTOP ELECTRONICS CO., LIMITED TEL:+86-0755-61511561 FAX:+86-0755-61280927		批准	日期	比例	公差範圍	
				1:1	.0	±0.3
電話:0755-61511561 傳真:0755-61280927		審核	單位	視圖	.00	±0.2
				m m		.000
料號	ST-FPC-10-026	繪圖	編號	尺寸	角度	
FPC 1.0J				A4	±2°	