

仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specification:

Current Rating : 7AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 1000V





Material:

Insulator : Polyester (UL94V-0)

Standard: PA9T/PBT

Contact: Brass

Plating : Au or Sn Over 50u" Ni

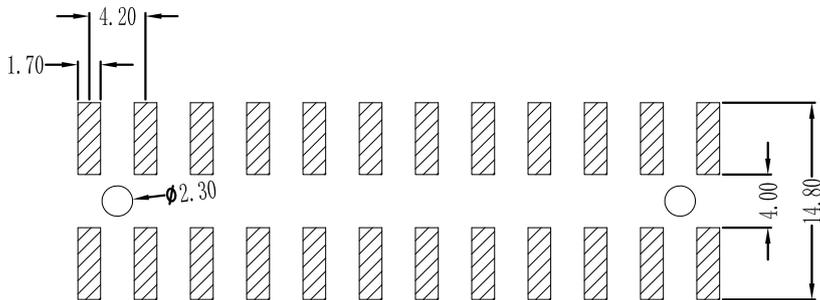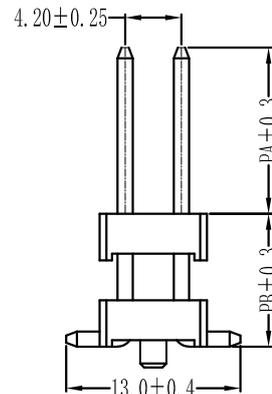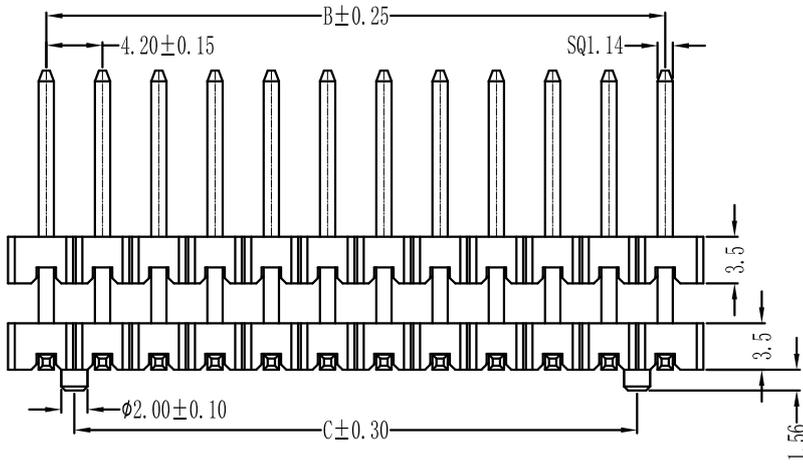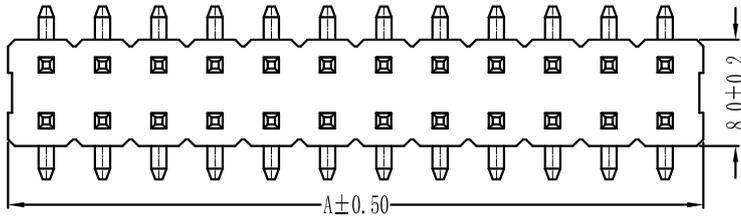

PCB LAYOUT

Pin数	尺寸A	尺寸B	尺寸C
2×1	4.70	-	-
2×2	8.90	4.20	-
2×3	13.10	8.40	4.20
2×4	17.30	12.60	8.40
2×5	21.50	16.80	12.60
2×6	25.70	21.00	16.80
2×7	29.90	25.20	21.00
2×8	34.10	29.40	25.20
2×9	38.30	33.60	29.40
2×10	42.50	37.80	33.60
2×11	46.70	42.00	37.80
2×12	50.90	46.20	42.00
2×13	55.10	50.40	46.20
2×14	59.30	54.60	50.40
2×15	63.50	58.80	54.60
2×16	67.70	63.00	58.80
2×17	71.90	67.20	63.00
2×18	76.10	71.40	67.20
2×19	80.30	75.60	71.40
2×20	84.50	79.80	75.60

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szsituo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-PH-420-0131	
	LINEAR	ANGLES					APPROVED	DWG. NO:
	0.0±0.30	X° REF±6°	DESIGNER	REV: A0	SHEET: 1/1			
	UNIT: MM	0.00±0.20	X° ±3°	DRAWN	肖坤权		2017.06.16	TITLE: Pitch4.20mm Pin Header, Dual Plastic, Dual Row, SMT Type