
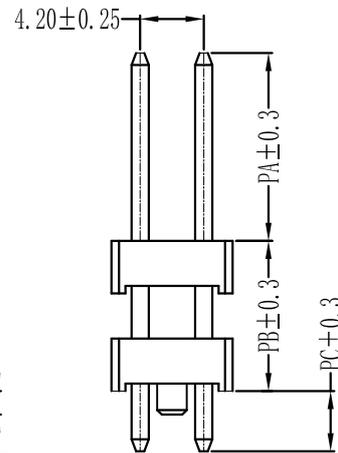
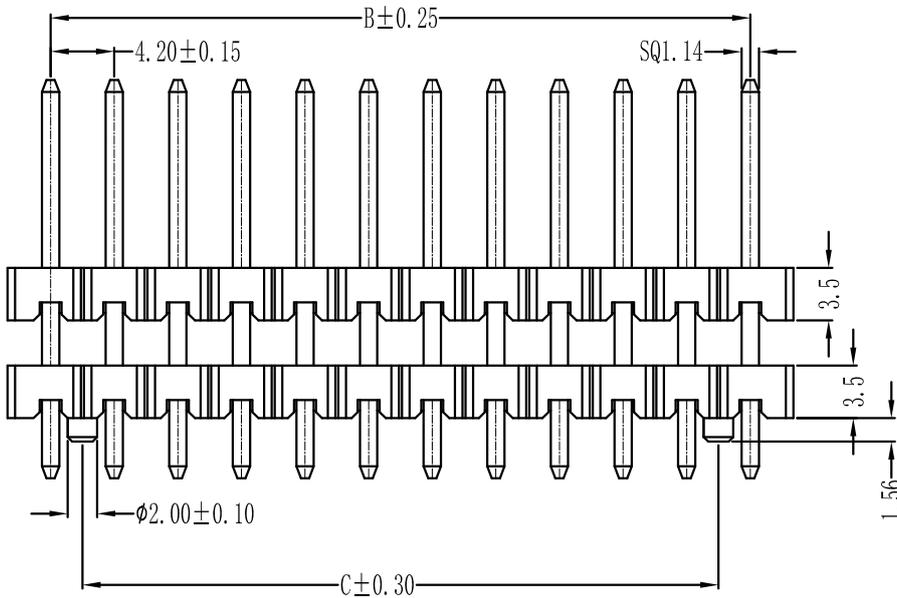



仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specification:  
 Current Rating : 7AMP  
 Temperature Range : -40°C to +105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 1000V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard: PA9T/PBT  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

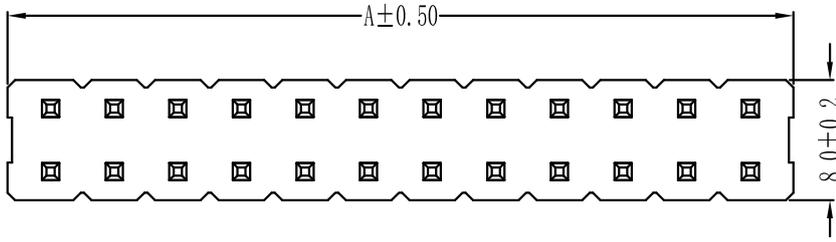

Pin数	尺寸A	尺寸B	尺寸C
2x1	4.70	-	-
2x2	8.90	4.20	-
2x3	13.10	8.40	4.20
2x4	17.30	12.60	8.40
2x5	21.50	16.80	12.60
2x6	25.70	21.00	16.80
2x7	29.90	25.20	21.00
2x8	34.10	29.40	25.20
2x9	38.30	33.60	29.40
2x10	42.50	37.80	33.60
2x11	46.70	42.00	37.80
2x12	50.90	46.20	42.00
2x13	55.10	50.40	46.20
2x14	59.30	54.60	50.40
2x15	63.50	58.80	54.60
2x16	67.70	63.00	58.80
2x17	71.90	67.20	63.00
2x18	76.10	71.40	67.20
2x19	80.30	75.60	71.40
2x20	84.50	79.80	75.60

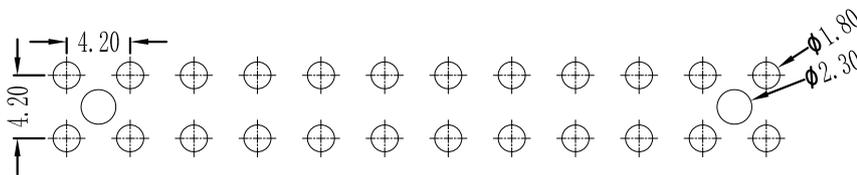

PCB LAYOUT

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: www.szsituo.cn 公司电话: 0755-23765350 邮编: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-PH-420-0127
	LINEAR	ANGLES	APPROVED				DWG. NO:
UNIT: MM	0.0 ± 0.30	X° REF ± 6°	DESIGNER			TITLE: Pitch 4.20mm Pin Header, Dual Plastic, Dual Row, DIP Type	REV: A0 SHEET: 1/1
SIZE: A4	0.000 ± 0.10	X° X' ± 2°	DRAWN	肖坤权	2017.06.16		