

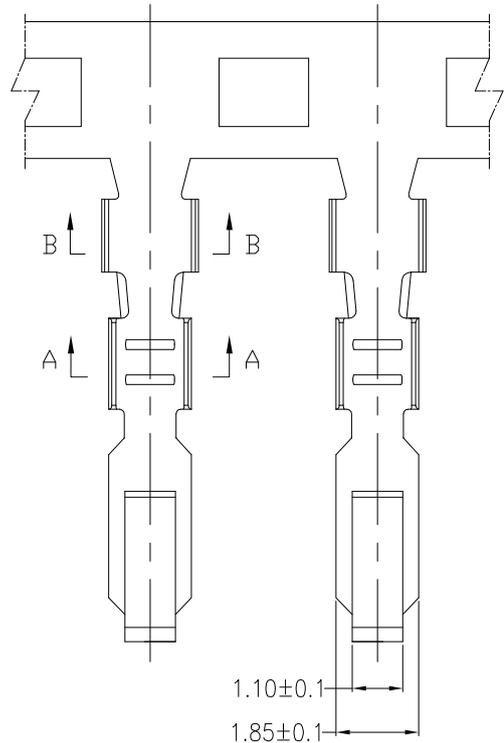


仅供参考


| | | |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE |
| A0 | 新图面发行 | 2017.06.16 |

主要技术参数 Main Specifications

- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.5A AC DC
- 耐电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

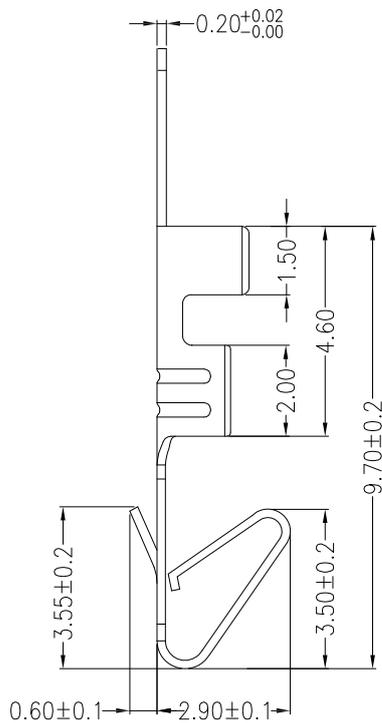

A-A



B-B

| Wire Range | Insulation O. D. | Material | Finish | Qty/Reel |
|-------------|------------------|-----------------|------------|-----------|
| AWG #20~#30 | 1.60mm (max) | Phosphor bronze | Tin-plated | 8.000 pcs |

| | | | | | | | | | |
|----------|--------------------|-----------|------------|------|------------|---|----------------|---------|------------|
| | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341 | PART. NO: | | |
| | LINEAR | ANGLES | APPROVED | | | | ST-WF-254-003T | | |
| UNIT: MM | 0.0±0.30 | X° REF±6° | DESIGNER | | | DWG. NO: | | | |
| SIZE: A4 | 0.000±0.10 | X° X'±2° | DRAWN | 肖坤权 | 2017.06.16 | TITLE: | | | |
| | | | | | | 2.54mm PITCH TERMINAL | | REV: A0 | SHEET: 1/1 |