






仅供参考

| | | |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE |
| A0 | 新图面发行 | 2017.06.16 |

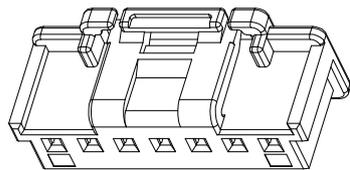

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
 材 质 (Material): PBT UL94V-0
 接触电阻 (Contact resistance): $\leq 10m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 125V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐 电 压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}C \sim +105^{\circ}C$

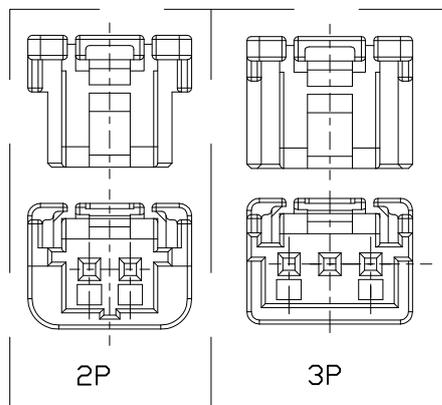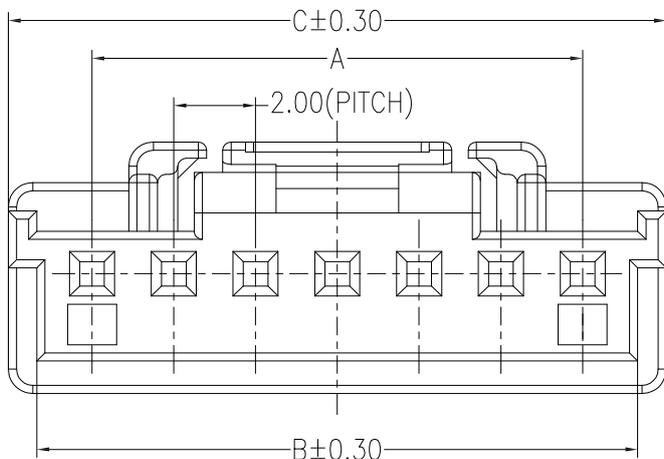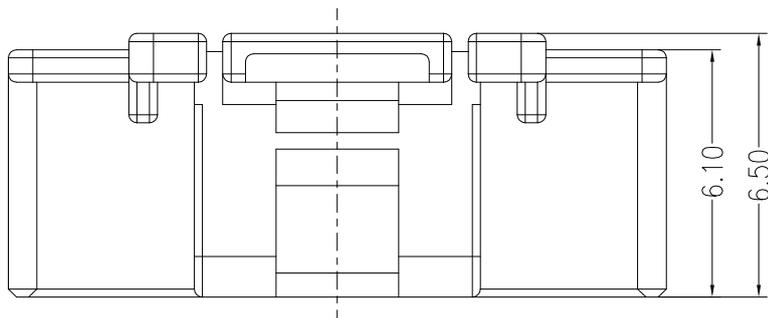

| PIN. | DIM A | DIM B | DIM C |
|-------|-------|-------|-------|
| 2pin | 2.00 | 4.70 | 8.00 |
| 3pin | 4.00 | 6.70 | 8.10 |
| 4pin | 6.00 | 8.70 | 10.10 |
| 5pin | 8.00 | 10.70 | 12.10 |
| 6pin | 10.00 | 12.70 | 14.10 |
| 7pin | 12.00 | 14.70 | 16.10 |
| 8pin | 14.00 | 16.70 | 18.10 |
| 9pin | 16.00 | 18.70 | 20.10 |
| 10pin | 18.00 | 20.70 | 22.10 |
| 11pin | 20.00 | 22.70 | 24.10 |
| 12pin | 22.00 | 24.70 | 26.10 |
| 13pin | 24.00 | 26.70 | 28.10 |
| 14pin | 26.00 | 28.70 | 30.10 |
| 15pin | 28.00 | 30.70 | 32.10 |

| | | | | | | | | |
|----------|--------------------|-----------|---------------|-------------------------------|------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|----------|
| | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341 | PART. NO: ST-WF-200-009Y | |
| | LINEAR | ANGLES | | | | | APPROVED | DWG. NO: |
| UNIT: MM | 0.0±0.30 | X° REF±6° | DESIGNER | TITLE: 2.00mmPITCH HOUSING | | REV: A0 | SHEET: 1/1 | |
| SIZE: A4 | 0.000±0.10 | X° X'±2° | DRAWN | 肖坤权 | 2017.06.16 | | | |