

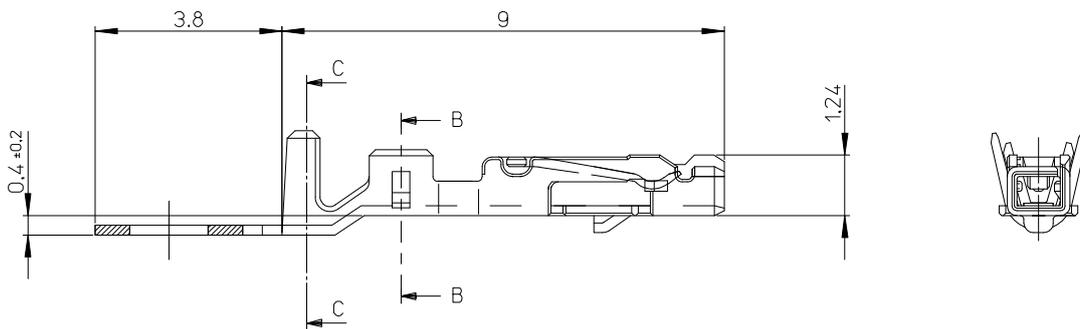


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

**主要技术参数 Main Specifications**

- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 150V AC DC
- 额定电流 (Rated current): 3.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

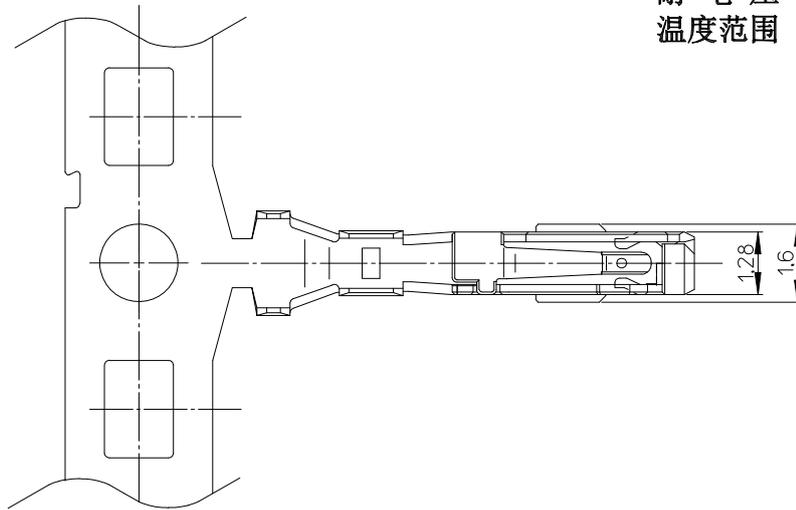

SECTION B-B  
(SCALE:20-1)

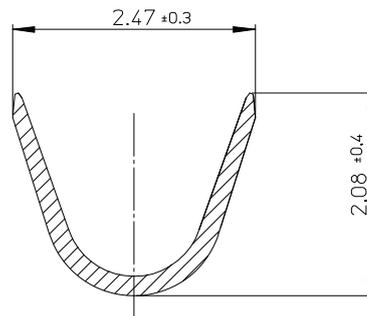

SECTION C-C  
(SCALE:20-1)

Wire Range	Insulation O. D.	Material	Finish	Qty/Reel
AWG #22~#26	0.95~1.50mm	Copper Alloy	Tin-plated	

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:	
	LINEAR	ANGLES	APPROVED				ST-WF-200-005T1	
UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER			DWG. NO:		
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	TITLE:		
						2.00mm PITCH TERMINAL		
						REV: A0	SHEET: 1/1	