






仅供参考

| | | |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE |
| A0 | 新图面发行 | 2017.06.16 |

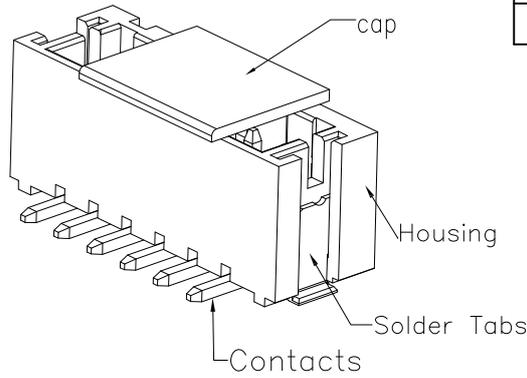

Specifications:

- Contact resistance: $\leq 20m\Omega$
- Insulation resistance: $\geq 1000M\Omega$
- Rated voltage: 250V AC DC
- Rated current: 2.0A AC DC
- Withstand Voltage: 1000V AC/minute
- Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$
- Housing: LCP/PA9T UL94V-0,
- Contacts: Brass/Sn or Matte Sn-plated
- Solder Tabs: Phosphor Bronze/Sn or Matte Sn or GOLD-plated

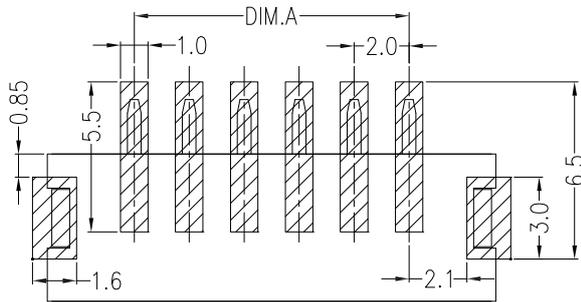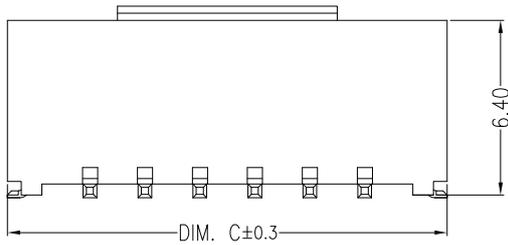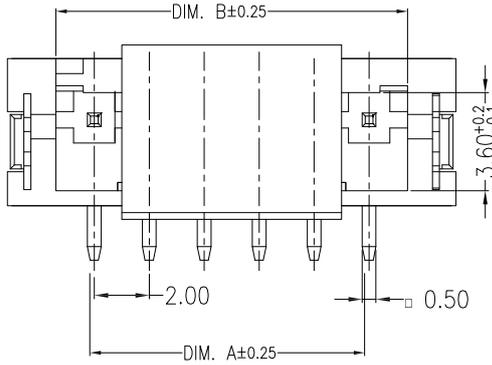

SUGGESTED PCB LAYOUT

| Circuits | Dimensions (mm) | | |
|----------|-----------------|--------|--------|
| | DIM. A | DIM. B | DIM. C |
| 02 | 2.00 | 4.80 | 8.00 |
| 03 | 4.00 | 6.80 | 10.00 |
| 04 | 6.00 | 8.80 | 12.00 |
| 05 | 8.00 | 10.80 | 14.00 |
| 06 | 10.00 | 12.80 | 16.00 |
| 07 | 12.00 | 14.80 | 18.00 |
| 08 | 14.00 | 16.80 | 20.00 |
| 09 | 16.00 | 18.80 | 22.00 |
| 10 | 18.00 | 20.80 | 24.00 |
| 11 | 20.00 | 22.80 | 26.00 |
| 12 | 22.00 | 24.80 | 28.00 |
| 13 | 24.00 | 26.80 | 30.00 |
| 14 | 26.00 | 28.80 | 32.00 |
| 15 | 28.00 | 30.80 | 34.00 |
| 16 | 30.00 | 32.80 | 36.00 |

| | | | | | | | |
|----------|--------------------|-------------|---|-------|------|---|------------------|
| | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | 深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司地址: www.szsituo.cn 公司电话: 0755-23765350 邮 箱: 2850175982@qq.com 公司传真: 0755-23765341 | PART. NO: |
| | LINEAR | ANGLES | APPROVED | | | | ST-WF-200-001AWV |
| | 0.0 ± 0.30 | X° REF ± 6° | DESIGNER | | | | DWG. NO: |
| | UNIT: MM | 0.00 ± 0.20 | X° ± 3° | DRAWN | 肖坤权 | | 2017.06.16 |
| SIZE: A4 | 0.000 ± 0.10 | X° X' ± 2° | TITLE: 2.00mm PITCH 180° WAFER SMT TYPE | | | | SHEET: 1/1 |