
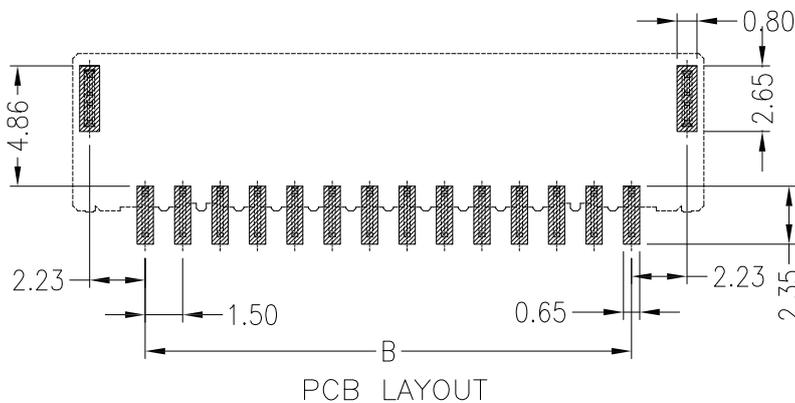
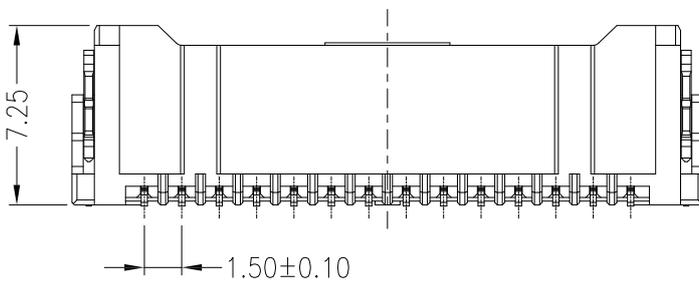

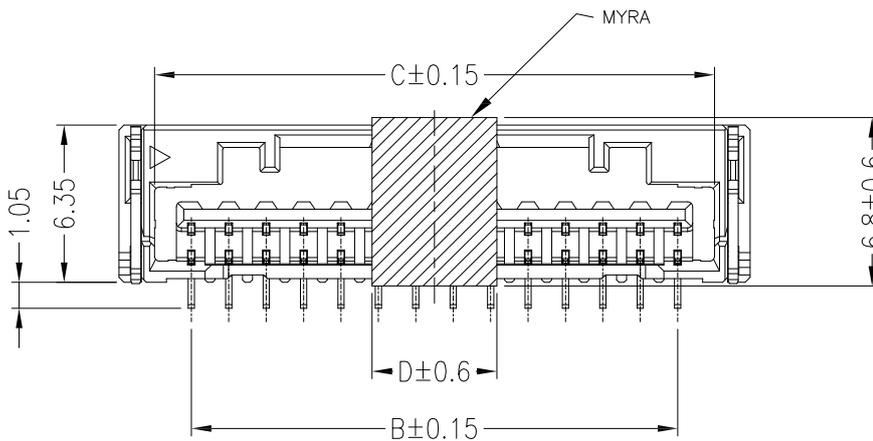


仅供参考

REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:

Contact resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 500M\Omega$
 Rated voltage: 100V AC DC
 Rated current: 2.0A AC DC (AWG#24)
 Withstand Voltage: 500V AC/minute
 Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, Natural (Beige)
 Contacts: Phosphor Bronze/Sn-plated
 Solder Tabs: Brass/Sn-plated

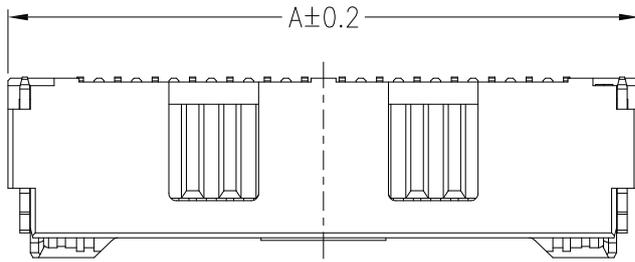

尺寸	A	B	C	D
* 2P	7.30	1.50	4.45	6.10
* 3P	8.80	3.00	5.95	7.60
* 4P	10.3	4.50	7.45	9.10
* 5P	11.8	6.00	8.95	10.6
6P	13.3	7.50	10.45	12.1
7P	14.80	9.00	11.95	13.60
8P	16.30	10.50	13.45	5.00
9P	17.80	12.00	14.95	5.00
10P	19.30	13.50	16.45	5.00
11P	20.80	15.00	17.95	5.00
12P	22.30	16.50	19.45	5.00
13P	23.80	18.00	20.95	5.00
14P	25.30	19.50	22.45	5.00
15P	26.80	21.00	23.95	5.00

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO., LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO:
	LINEAR	ANGLES					APPROVED
UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER	TITLE:	1.50mmPITCH 180° WAFER SMT TYPE	REV: A0	DWG. NO:
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	SHEET: 1/1	