
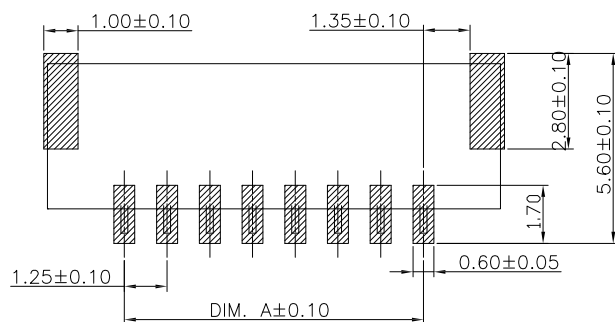
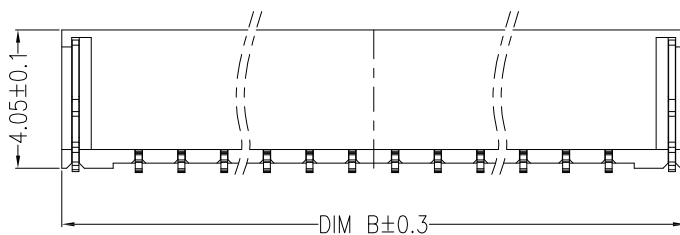
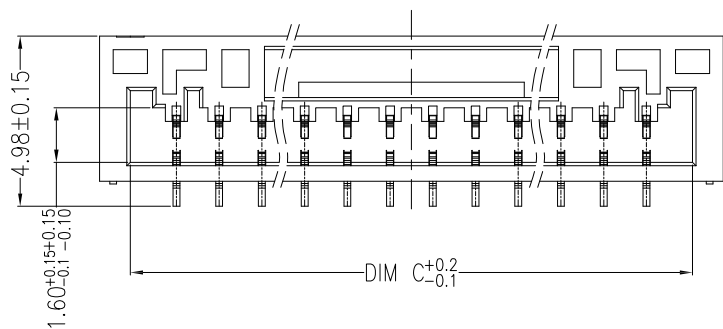


仅供参考



REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
绝缘电阻 (Insulation resistance): $\geq 100\text{M}\Omega$
额定电压 (Rated voltage): 50V AC DC
额定电流 (Rated current): 1.0A AC DC
耐 电 压 (Withstand Voltage): 500V AC/minute
温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

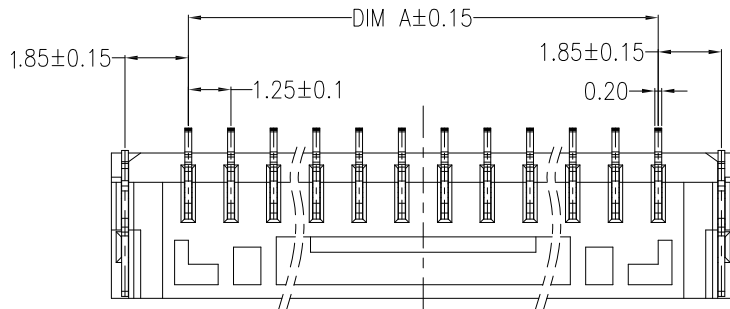

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

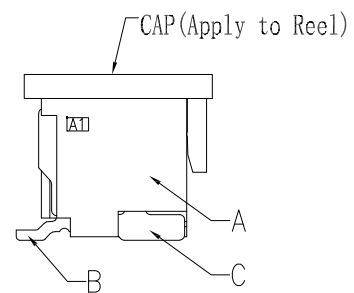

孔数	DIM A	DIM B	DIM C	DIM E
2P	1.25	5.75	3.75	0.75
3P	2.50	7.00	5.00	1.00
4P	3.75	8.25	6.25	1.25
5P	5.00	9.50	7.50	1.50
6P	6.25	10.75	8.75	1.75
7P	7.50	12.00	10.00	2.00
8P	8.75	13.25	11.25	2.25
9P	10.00	14.50	12.50	2.50
10P	11.25	15.75	13.75	2.75
11P	12.50	17.00	15.00	3.00
12P	13.75	18.25	16.25	3.25
13P	15.00	19.50	17.50	3.50
14P	16.25	20.75	18.75	3.75
15P	17.50	22.00	20.00	4.00

D	CAP	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	02~15PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH



GENERAL TOLERANCES

LINEAR	ANGLES
0.0 ± 0.30	$X^{\circ} \text{ REF} \pm 6^{\circ}$

0.00 ± 0.20	$X^{\circ} \pm 3^{\circ}$
-----------------	---------------------------

0.000 ± 0.10	$X^{\circ} X' \pm 2^{\circ}$
------------------	------------------------------

SCALE:

1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖坤权

2017.06.16



深圳市思拓展电子有限公司

SHENZHEN SINOTOP ELECTRONICS CO., LTD

公司网址: www.szstuo.cn 公司电话: 0755-23765350

邮 箱: 2850175982@qq.com 公司传真: 0755-23765341

TITLE:

1.25mmPITCH 180° WAFER SMT TYPE

PART. NO:

ST-WF-125-003AWV

DWG. NO:

REV: A0

SHEET: 1/1