
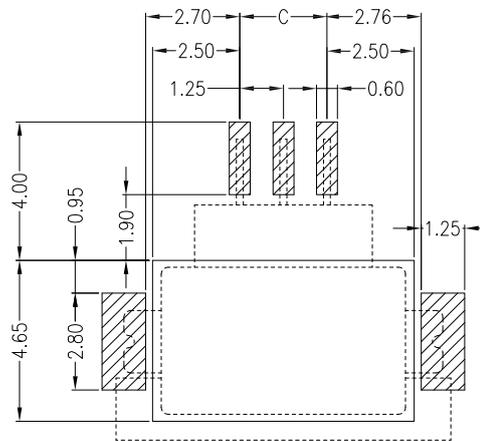


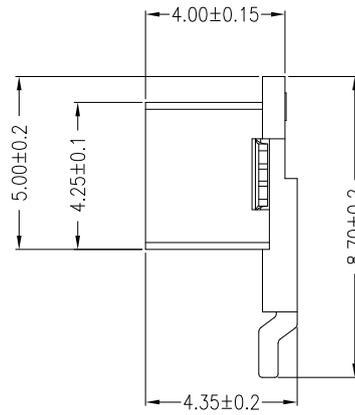
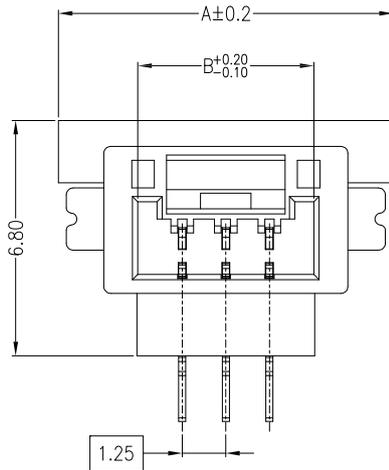


仅供参考


REV.	REVISION RECORD	DATE
A0	新图面发行	2017.06.16

Specifications:

Poles:02~15
 Contact resistance: $\leq 10m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage:150V AC DC
 Rated current:1.0A AC DC
 Withstand Voltage: 800V AC/minute
 Temperature Range: $-40^{\circ}C \sim +85^{\circ}C$
 Housing:LCP UL94V-0,Natural(Beige)
 Contacts: Phosphor Bronze Sn-plated
 Solder Tabs:Brass Sn-plated

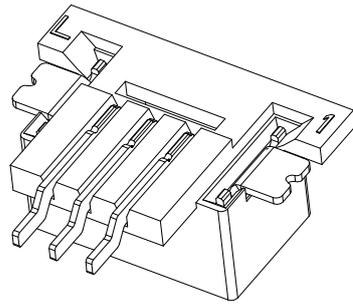

SUGGESTED PCB LAYOUT

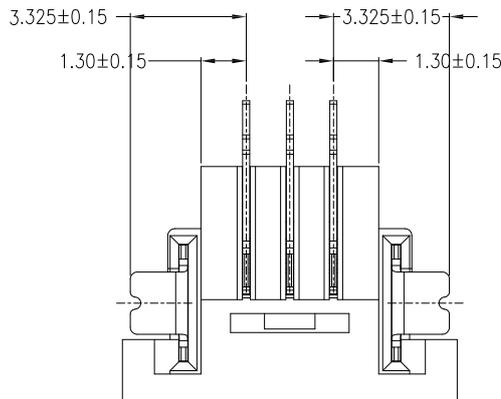

Circuits	Dimensions (mm)		
	A	B	C
02	8.35	3.80	1.25
03	9.60	5.05	2.50
04	10.85	6.30	3.75
05	12.10	7.55	5.00
06	13.35	8.80	6.25
07	14.60	10.05	7.50
08	15.85	11.30	8.75
09	17.10	12.55	10.00
10	18.35	13.80	11.25
11	19.60	15.05	12.50
12	20.85	16.30	13.75
13	22.10	17.55	15.00
14	23.35	18.80	16.25
15	24.60	20.05	17.50

	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	深圳市思拓展电子有限公司 SHENZHEN SINOTOP ELECTRONICS CO.,LTD 公司网址: www.szstuo.cn 公司电话: 0755-23765350 电子邮箱: 2850175982@qq.com 公司传真: 0755-23765341	PART. NO: ST-WF-125-003FWV
	LINEAR	ANGLES					
UNIT: MM	0.00±0.20	X° REF±6°	DESIGNER			TITLE:	REV: A0
SIZE: A4	0.000±0.10	X° X'±2°	DRAWN	肖坤权	2017.06.16	1.25mmPITCH 180° WAFER SMT TYPE	SHEET: 1/1