
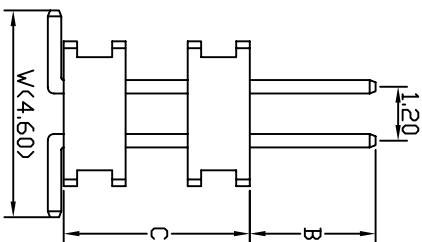


0.80 X No. of Positions

0.80 X No. of Contacts-0.80

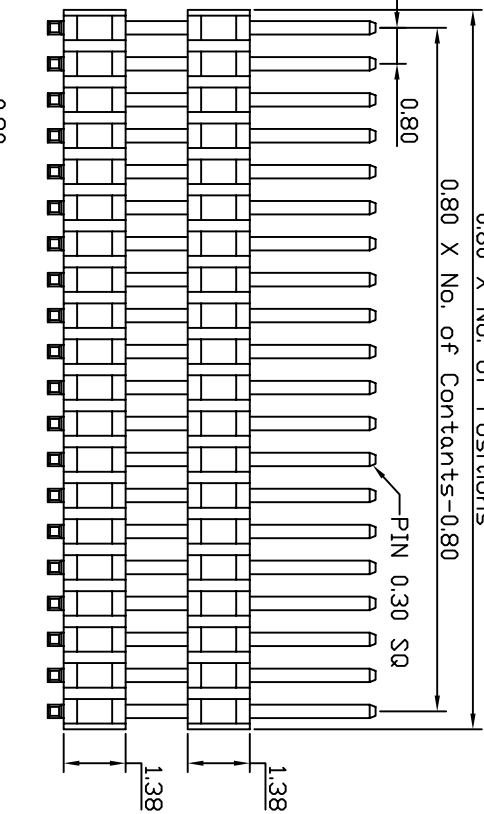

SPECIFICATIONS

Current Rating : 0.75AMP

Operation Temperature : -40°C to +105°C

Contact Resistance : 30mΩ Max.

Insulation Resistance : 1000MΩ Min


Withstanding Voltage : AC 500V

Insulator Material : High Temperature Thermoplastic (UL94V-0)

Contact Material : Phosphor Bronze

Contact Plating : Au Over 50 U" Ni

PCB LAYOUT

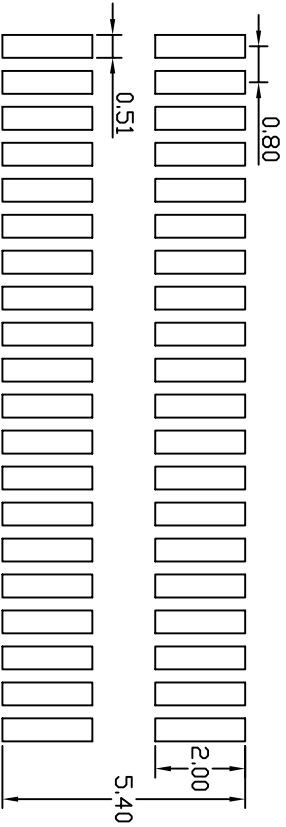

17114

2

XX

GO

X M

XXX

01

Contact Plating
 SN: Tin
 GO: Gold Flash
 G2: 50U"Gold
 G3: 10U"Gold
 G4: 15U"Gold
 G5: 30U"Gold
 SO: Gold Flash/Tin Standard: GO

Insulator Material Option
 A BK-PBT
 B BK-PA66
 C BK-PA6T
 D BK-PA46
 F BK-LCP
 S Special

Pin Length
 XXX=B+D+ (W-L.2)/2

QUALITY SYMBOLS	GENERAL TOLERANCES	思拓電子(深圳)有限公司 situto (shenzhen) electronic co., ltd	
X	± 0.15	地址: 廣東省深圳市寶安區公明鎮樓村第二工業區	
.X	± 0.08	Tel: 0755-61511560	
.XX	± 0.05	Fax: 0755-61511561	
.XXX	± 0.00	BRAVN BY	DATE
ANGLE TOLERANCES		傅維成	2007/02/23
X°	± 2.0°	CHECKED BY	DATE
.X°	± 1.0°	傅維成	2007/02/23
.XX°	± 0.5°	APPROVED BY	DATE
.XXX°	---	傅維成	

TITLE:	0.8*1.2mm Board Spacer, Dual Row, S. M. T
PART NO.	STPH-08060002
MATERIAL:	HRC
UNIT:	MM
THIRD ANGLE PROJECTION	A4