

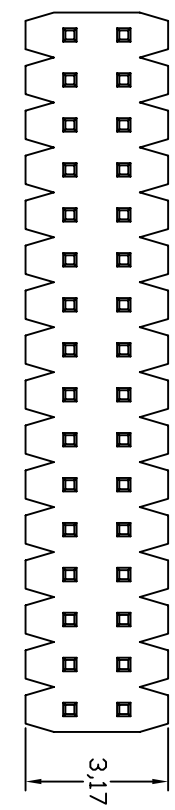


NO.	DATE	REV.	MODIFY NOTES	REVISED
1	2008/06/26	A/0	新版发行	傅维成

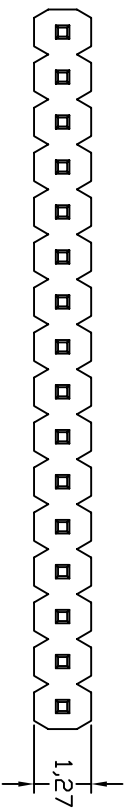

### SPECIFICATIONS

Current Rating : 0.75AMP

Operation Temperature : -40°C to +105°C

Contact Resistance : 30mΩ Max.




Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Insulator Material : Polyester (UL94V-0)  
Standard: Nylon-6T

Contact Material : Phosphor Bronze

Contact Plating : Au Over 50 U" Ni

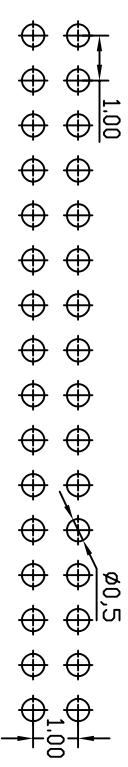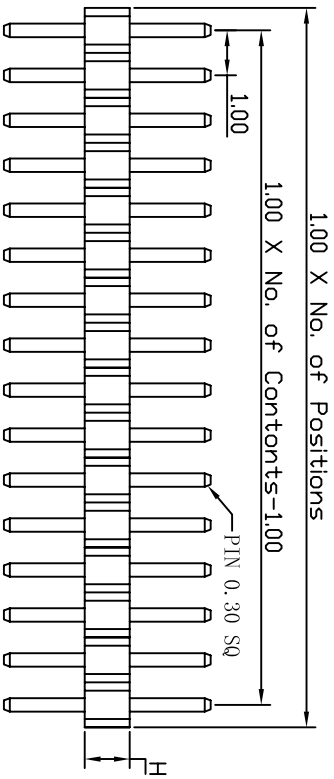

### PCB LAYOUT

1610 1 XX GO XS XXX 01

Plastics Height  
H=1.00mm  
H=1.50mm

No. of Pins Per Row  
2X50  
2-100

Contact Plating  
SN: Tin  
G0: Gold Flash  
G2: 50"Gold  
G3: 100"Gold  
G4: 150"Gold  
G5: 300"Gold  
S0: Gold Flash/Tin  
Standard: G0

Insulator Material Option  
A BK-PPT  
B BK-P466  
C BK-P46T  
D BK-P446  
F BK-LCP  
S Special

Pin Length  
XXX=A+B+H

QUALITY SYMBOLS	GENERAL TOLERANCES
X	± 0.15
.X	± 0.08
.XX	± 0.05
.XXX	± 0.00

思拓电子(深圳)有限公司  
situto (shenzhen) electronic co., ltp

地址: 广东省深圳市宝安區公明鎮樓村第二工業區  
Tel: 0755-61511560 Fax: 0755-61511561

DATE: 2008/06/26

傅维成

DATE: 2008/06/26

傅维成

TITLE:	PART NO.	DWG NO.
1.0mm Pin Header, Single/Dual Row, Straight		STPH-08060003

MATERIAL:	HCC:	UNIT:
		MM

THIRD ANGLE PROJECTION A4

ST-FOR-703-03 A/0